

G-Speaker

Full Range Personal Monitor & PA System

GPS-8

New for 2016 is the Galaxy Audio GPS-8 full range personal monitor PA system that packs huge sound while remaining compact and versatile. The GPS-8 is a powered, 200 watt, two-way, compact PA speaker with a unique asymmetrical shape which allows for wedge placement or pole mounting. The GPS-8 features an 8" low frequency driver and a 1" compression driver. The GPS-8 features a Bass Boost which will enhance the low end response to deliver that extra thump.

The GPS-8 has a mic/line switch, as well as a variable gain control, giving it the capability of accepting most any input level. The handy XLR/1/4" combo input jack accepts balanced and unbalanced signals. There is an LED to indicate when switched into mic level position. You can tell at a glance your input status via the green LED for signal input, and the red LED indicating the on board limiter is functioning and that the level should be reduced.

To make linking of units a breeze, an XLRM pass-through jack is included. This is unaffected by the input level control, to make it simple to adjust levels of units independently. Other features of GPS-8 include: Lighted power switch, switchable 110V/220V mains power, integrated carry handle and a lightweight, durable, compact, attractive, housing.



- 2-Way System
- 200 Watts
- Built-in Compressor/Limiter
- Switchable Mic/Line Input (XLR/1/4" Combo)
- Integrated Handle
- Wedge Shape Design
- Speaker Pole Mount
- Fly Points
- Pass Thru Allows for Connection of Multiple Units



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

G-Speaker

Full Range Personal Monitor & PA System


GPS-8

Specifications

Frequency Response: (± 3 dB) 75 Hz - 17.5 kHz
Output/Peak: 200 Watts
Sensitivity: 100 dB, 1 W @ 1 m
Speaker Compliment: 8" Diameter Woofer, 1" Compression Driver
Nominal Coverage Pattern: 90° H x 60° V
Input Connections: One - XLR/1/4" Balanced/Unbalanced
Output Connections: One - XLR Balanced
Controls: Level, Mic/Line, Bass Boost +3 dB @ 90 Hz, Power
Indicators: Power, Signal, Limit, Mic
Protection: Limit, Thermal, Over-Excursion
Power Supply: 115/230 VAC, 2A
Enclosure Material: ABS Plastic, Steel Grill
Mounting/Rigging: 1-3/8" (35 mm) Pole Socket, Four M8 T-nut Mounting Points
Handle: Integrated
Color: Black
Accessories: N/A
Dimensions: 16.34" x 11.6" x 8.66" (HxWxD)
(415 x 295 x 220 mm)
Weight: 17 lbs (7.7 kg)



Bottom image

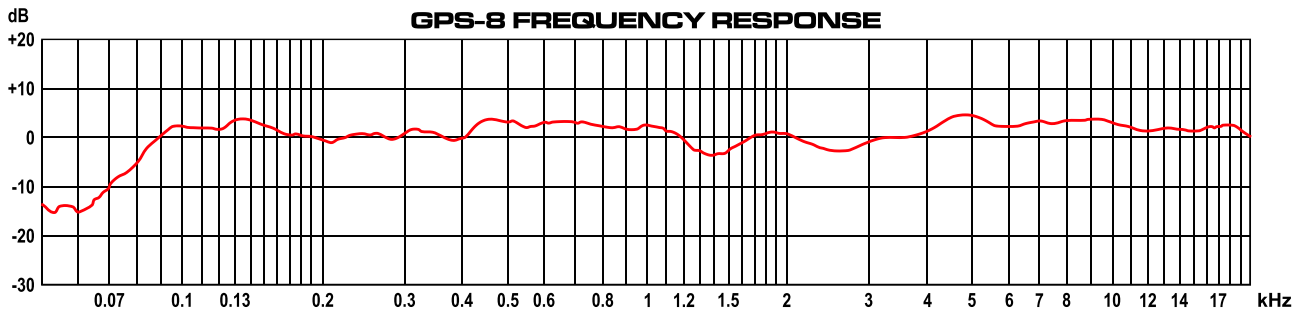

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180

V20160419